









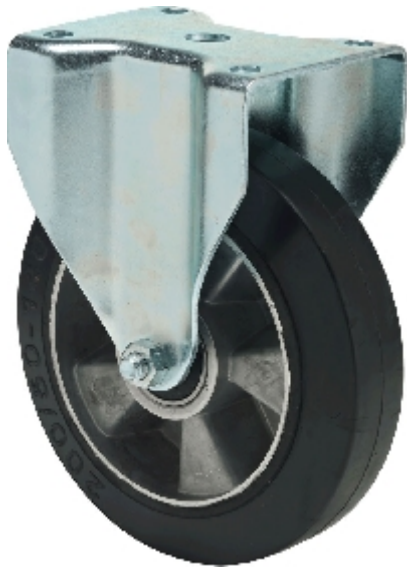

Fixed castor:

FTAB 1603 6440



## Technical data

|                         |   |                |
|-------------------------|---|----------------|
| Diameter                |    | 160 mm         |
| Wheel width             |    | 50 mm          |
| Hub length              |    | 62 mm          |
| Height                  |    | 193 mm         |
| Top plate dimensions    |    | 135 x 110 mm   |
| Top plate hole diameter |    | 11 mm          |
| Dist. between holes     |   | 105 x 75/80 mm |
| Load capacity           |  | 350 kg         |
| Weight                  |  | 2.3 kg         |

## Technical description

Rigid fork of zinc-coated sheet steel with an extra sturdy plate (4 mm) and fork legs (3.5 mm) for even higher load capacity



## Wheel

Aluminium wheels with black rubber tyre (Shore A 72) with two deep groove ball bearings and steel collar bushes external diameter 15/20/25 mm to internal 8/10/12 mm. Operating temperatures from -20°C to + 80°C